



Ultraschall-Dickenmessgerät Upad X400

Das Upad X 400 Ultraschall-Dickenmessgerät ist eine sehr gute Wahl für die Durchführung von Dickenmessungen.


Es eignet sich für viele Arten von Metallen, wie Stahl, Stahlguss, Aluminium usw. und anderen Materialien wie Kunststoff, Porzellan, Glasfaser und alle anderen guten Schall-Leitern.

Die Anwendung ist einfach und intuitiv. Der klare LCD-Bildschirm macht das Lesen von Daten einfach. Die mobilen Messdaten werden auf einem USB Stick gespeichert. Die Bluetooth-Funktion liest und überträgt die Daten z.B. auf einen PC.

Die Kalibrierung der Sonden erfolgt automatisch per Nullstellungskalibrierungen.

Eigenschaften:

1. Modi: Puls Echo/Echo Echo
P-E 0,75 – 500 mm
Echo – Echo
Beschichtungen 1-2 mm
Unter Beschichtungen 2-25 mm
2. Messbereich 1000 – 9999 m/s
3. Frequenzbereich 0,5 – 15 MHz
4. Genauigkeit 0,1 mm (>100 mm), 0,01 (<100 mm)
5. USB-Verbindung, bequemes Lesen/Speichern von Daten über USB-Stick
6. Großer Datenspeicher – 100.000 Datensätze
7. Erkennung der Sondenverbindung
8. Lange Standby-Zeit: 200 Stunden
9. Selbstkalibrierung
10. Bluetooth
11. Zahlreiche statistische Funktionen
12. Handgerät 250 g (inkl. Akku)

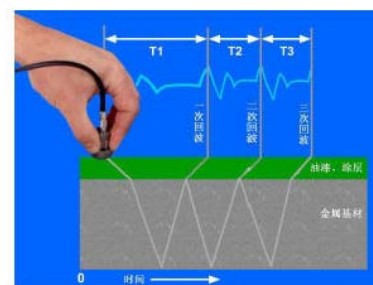

The indicator of eliminating coating

No	0	MAX	10.00
File	0		
Unit			
EE	10.00		mm
↑	300.0	MIN	1.00
↓	0.00		



Brief Interface



Menu

- **Statistic Function**

Online statistic :Max Min, Standard Devraation
Document Statistic : Max Min Average, mean square error

- **Probe Connection/Coupling Indicator**

- **Bluetooth function**

it is more convenient to transfer data, and it is more intuitive and clear to read data.

- **LCD display screen**

clear reading value

- **Accuracy : 0.1/0.01mm or 0.01/0.001 inch resolution**

- **Extra-long standby time : 200 hours.**

performance index	
Working principle	Ultrasound (ultrasonic pulse echo / echo echo)
Detection range	Normal mode : 0.75~400mm Penetrate the coating : 2~25mm (Depending on the probe, the measured material and surface condition)
Resolution	0.1mm(> 100mm)/0.01mm(<100mm)
Indicator	± (0.5%H+0.01) mm
Velocity	1000~9999m/s, Preset 5 commonly used material velocity
Calibration	Through the realization of real-time calibration probe zero unique

automatic zerocalibration technique
V range correction Auto
Probeconnection indicating Yes
Coupling condition Cue signal coupling intensity: measured value displayed solid / hollow change, visual indication of whether the normal measurement
Appearance size 165×82×30 mm
Weight 250g (Including battery)
Work environment Temperature: -20℃~70℃ Humidity: 5%~90%

The environment without strong vibration, no strong magnetic field, non corrosivemedium and serious dust.
Measuring Range: Normal : 0.75~400mm Coating : 2~25mm
Excitation pulse 150V Negative spike
Receiving system
Gain High / low / automatic
Frequency bandwidth 0.5~15MHz
Display
LCD dot matrix display High contrast 128X64 Beautiful characters Number, Symbol, High Brightness EL Backlight

Refresh rate measurement Single point measurement of 5 times per second, 25 times / sec scan mode	threshold	Language Chinese/ English
Measured value / alarm	Storage	Unit mm/inch
Measured value display 3 custom measurement display area, can choose online statistics or sound	Data set 1000 Sets	Power Source
Statistical data Online Statistics: maximum, minimum, standard deviation Document statistics: maximum / small value, mean, variance	The thickness values 1000sets/Group Linearity	Battery 1.5V AAA x 4
Alarm Acousto optic alarm	USB Storage Connection USB is allowed, convenient to read thickness values	Working time Can work continuously for 200 hours (standard test conditions)
	Input and output	Standard Package
	probeconnection LEMO 00 (C5) x2	Host 1 Instructions 1
	Communication RS232/USB	Probe 1 Packingbox 1
		Battery 1 couplant 1

... Probe of Our Thickness Gauge

Model	Automatic zero	Measurement precision	USB	Penetrate the coating	Statistical function	Storage Capacity
Upad X100	V	0.1/0.01mm	X	X	Online statistics	100 Groups
Upad X200	V	0.1/0.01mm	V	X	Online statistics / data statistics	500 Groups
Upad X300	V	0.1/0.01mm	V	V	Online statistics / data statistics	1000 Groups

... Probe of Our Thickness Gauge

Application	Mode	Rate	Probe Diameter	Measuring range	Minimum diameter
Standard application	DA301S	5 MHz	10mm	0.75mm~400.0mm (Steel)	Φ20mm×3.0mm
Standard application	DA301S/90	5 MHz	10mm	0.75mm~400.0mm (Steel)	Φ20mm×3.0mm
Thick Wall	DA303S	2 MHz	22mm	3.0mm~300.0mm (Steel)	20mm
Thin wall	DA312S	7 MHz	6mm	0.75mm~80.0mm (Steel)	Φ15mm×2.0mm
High temperature	HT400S	5 MHz	14mm	3~200mm (Steel)	30mm
High attenuation	DA408S	2 MHz	22mm	40mm ↓ (Grey cast iron HT200)	20mm

... Commonly used material velocity

Material type		Sound velocity	
		inch/us	m/s
Aluminum	Aluminum	0.250	6340-6400
Steel, common	Steel, common	0.233	5920
Steel, stainless	Steel, stainless	0.226	5740
Brass	Brass	0.173	4399
Copper	Copper	0.186	4720
Iron	Iron	0.233	5930
Cast Iron	Cast Iron	0.173-0.229	4400-5820
Lead	Lead	0.094	2400
Silver	Silver	0.142	3607
Gold	Gold	0.128	3251
Titanium	Titanium	0.236	5990
Tin	Tin	0.117	2960
Nickel	Nickel	0.222	5639
Porcelain	Porcelain	0.230	5842
Rubber, vulcanized	Rubber, vulcanized	0.091	2311
Water	Water	0.058	1473